

High forward current capability
 Low forward losses
 Low thermal resistance
 High load cycle capability

Rectifier Diode For Welding Type D053-7100-4-N

| | | |
|---------------------------------|------------|-------------|
| Average forward current | I_{FAV} | 7402 A |
| Repetitive peak reverse voltage | V_{RRM} | 200 ÷ 400 V |
| V_{RRM}, V | 200 | 400 |
| Voltage code | 2 | 4 |
| $T_j, ^\circ C$ | - 60 ÷ 170 | |

MAXIMUM ALLOWABLE RATINGS

| Symbols and parameters | | Units | Values | Test conditions |
|------------------------|--------------------------------------|-------------------|----------------------|---|
| ON-STATE | | | | |
| I_{FAV} | Average forward current | A | 7100 7402 6440 | $T_c = 89,8 ^\circ C$; Double side cooled; $T_c = 85 ^\circ C$; Double side cooled; $T_c = 100 ^\circ C$; Double side cooled; 180° half-sine wave; 50 Hz |
| I_{FRMS} | RMS forward current | A | 11147 | $T_c = 89,8 ^\circ C$; Double side cooled; 180° half-sine wave; 50 Hz |
| I_{FSM} | Surge forward current | kA | 55.0 63.0 | $T_j = T_{j\max}$ $T_j = 25 ^\circ C$ 180° half-sine wave; 50 Hz ($t_p = 10$ ms); single pulse; $V_R = 0$ V; |
| | | | 58.0 67.0 | $T_j = T_{j\max}$ $T_j = 25 ^\circ C$ 180° half-sine wave; 60 Hz ($t_p = 8.3$ ms); single pulse; $V_R = 0$ V; |
| I^2t | Safety factor | $A^2s \cdot 10^3$ | 15125 19845 | $T_j = T_{j\max}$ $T_j = 25 ^\circ C$ 180° half-sine wave; 50 Hz ($t_p = 10$ ms); single pulse; $V_R = 0$ V; |
| | | | 13960 18625 | $T_j = T_{j\max}$ $T_j = 25 ^\circ C$ 180° half-sine wave; 60 Hz ($t_p = 8.3$ ms); single pulse; $V_R = 0$ V; |
| BLOCKING | | | | |
| V_{RRM} | Repetitive peak reverse voltages | V | 200 ÷ 400 | $T_{j\min} < T_j < T_{j\max}$; 180° half-sine wave; 50 Hz; |
| V_{RSM} | Non-repetitive peak reverse voltages | V | 300 ÷ 500 | $T_{j\min} < T_j < T_{j\max}$; 180° half-sine wave; 50 Hz; single pulse; |
| V_R | Reverse continuous voltages | V | $0.75 \cdot V_{RRM}$ | $T_j = T_{j\max}$; |
| THERMAL | | | | |
| T_{stg} | Storage temperature | $^\circ C$ | - 60 ÷ 170 | |
| T_j | Operating junction temperature | $^\circ C$ | - 60 ÷ 170 | |
| MECHANICAL | | | | |
| F | Mounting force | kN | 30.0 ÷ 36.0 | |
| a | Acceleration | m/s^2 | 50 | Device unclamped |
| | | | 100 | Device clamped |

CHARACTERISTICS

| Symbols and parameters | | Units | Values | Conditions | |
|------------------------|---|---------------------------|----------------|--|---------------------|
| ON-STATE | | | | | |
| V_{FM} | Peak forward voltage, max | V | 1.05 0.89 | $T_j=25\text{ }^\circ\text{C}; I_{FM} = 5000\text{ A}$ $T_j=T_{j\text{ max}}; I_{FM} = 5000\text{ A}$ | |
| $V_{F(TO)}$ | Forward threshold voltage, max | V | 0.750 | $T_j=T_{j\text{ max}};$ | |
| r_T | Forward slope resistance, max | m Ω | 0.029 | $5000\text{ A} < I_T < 14000\text{ A}$ | |
| BLOCKING | | | | | |
| I_{RRM} | Repetitive peak reverse current, max | mA | 50 | $T_j=T_{j\text{ max}};$ $V_R=V_{RRM}$ | |
| SWITCHING | | | | | |
| Q_{rr} | Total recovered charge, max | μC | 950 | $T_j=T_{j\text{ max}}; I_{FM}=1000\text{ A};$ $di_{FM}/dt=-30\text{ A}/\mu\text{s}$ | |
| | | | 620 | $T_j=T_{j\text{ max}}; I_{FM}=1000\text{ A};$ $di_{FM}/dt=-10\text{ A}/\mu\text{s}$ | |
| THERMAL | | | | | |
| R_{thjc} | Thermal resistance, junction to case, max | $^\circ\text{C}/\text{W}$ | 0.0090 | Direct current | Double side cooled |
| R_{thjc-A} | | | 0.0210 | | Anode side cooled |
| R_{thjc-K} | | | 0.0160 | | Cathode side cooled |
| R_{thck} | Thermal resistance, case to heatsink, max | $^\circ\text{C}/\text{W}$ | 0.0050 | Direct current | |
| MECHANICAL | | | | | |
| w | Weight, typ | g | 140 | | |
| D_s | Surface creepage distance | mm (inch) | 7.3 (0.287) | | |
| D_a | Air strike distance | mm (inch) | 4.0 (0.157) | | |


PART NUMBERING GUIDE

| | | | | |
|---|-----|------|---|---|
| D | 053 | 7100 | 4 | N |
| 1 | 2 | 3 | 4 | |

1. Design version
2. Average forward current, A
3. Voltage code
4. Ambient conditions: N – normal


De-rating Main characteristics vs Mounting force

| Symbols and parameters | | Units | Values (F=20 kN) | Values (F=25 kN) | Conditions | |
|------------------------|---|---------------------------|---------------------|---------------------|--|---------------------|
| I_{FAV} | Average forward current | A | 5287 | 5788 | $T_c= 100\text{ }^\circ\text{C};$ Double side cooled; 180° half-sine wave; 50 Hz | |
| V_{FM} | Peak forward voltage, max | V | 1.06 0.90 | 1.06 0.90 | $T_j=25\text{ }^\circ\text{C}; I_{FM} = 5000\text{ A}$ $T_j=T_{j\text{ max}}; I_{FM} = 5000\text{ A}$ | |
| $V_{F(TO)}$ | Forward threshold voltage, max | V | 0.770 | 0.760 | $T_j=T_{j\text{ max}};$ | |
| r_T | Forward slope resistance, max | m Ω | 0.031 | 0.030 | $5000\text{ A} < I_T < 14000\text{ A}$ | |
| R_{thjc} | Thermal resistance, junction to case, max | $^\circ\text{C}/\text{W}$ | 0.0113 | 0.0102 | Direct current | Double side cooled |
| R_{thjc-A} | | | 0.0264 | 0.0235 | | Anode side cooled |
| R_{thjc-K} | | | 0.0218 | 0.0180 | | Cathode side cooled |

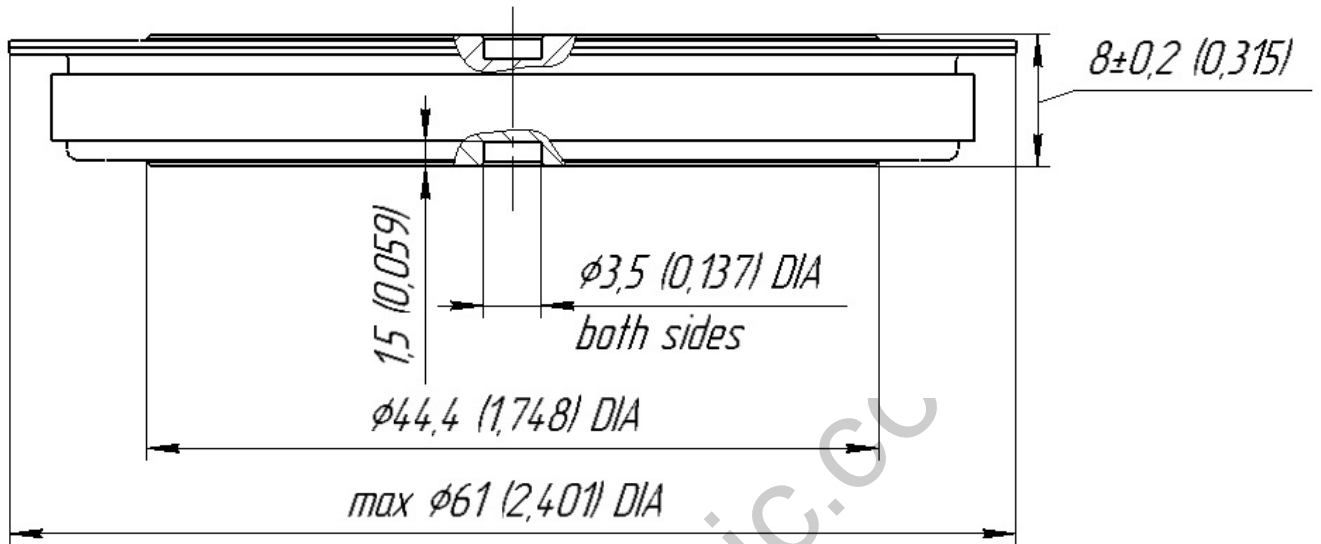

www.invotric.cc

All dimensions in millimeters (inches)

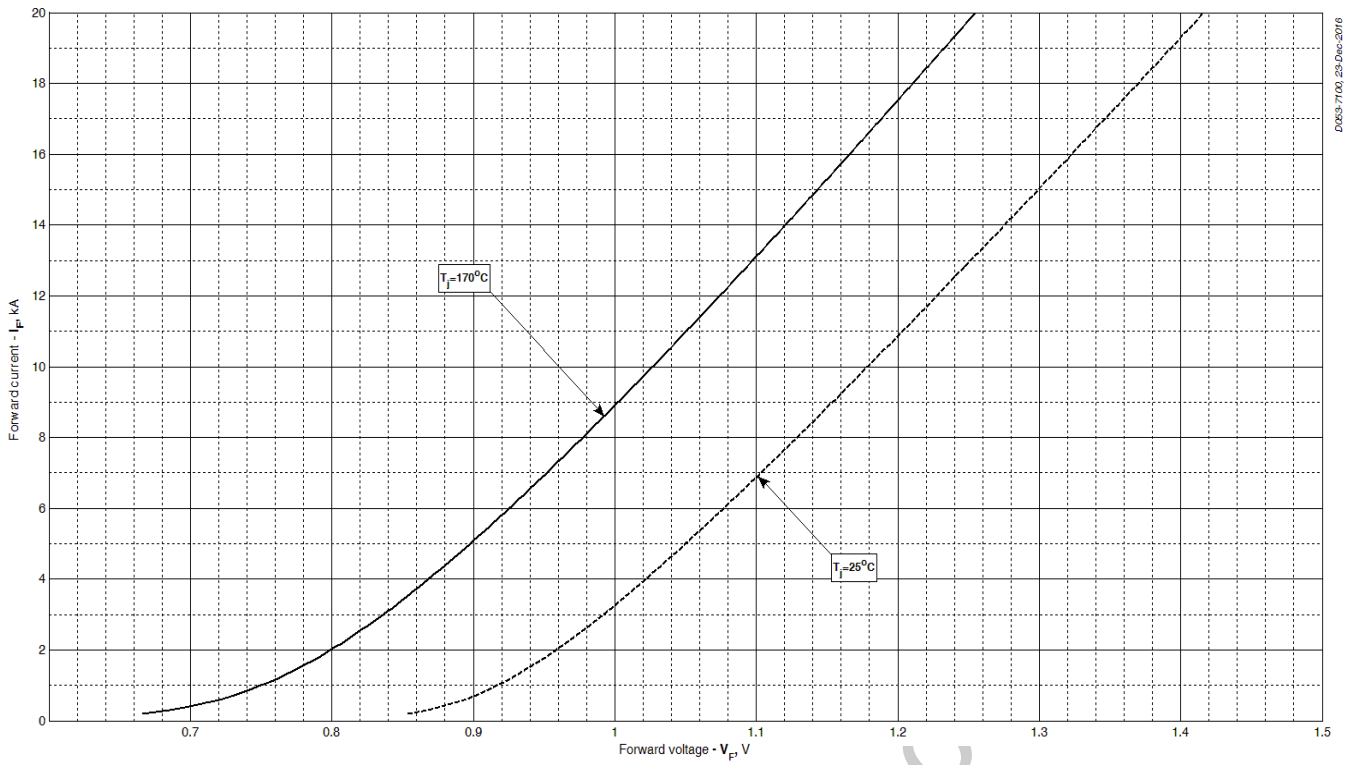

$$V_F = A + B \cdot i_F + C \cdot \ln(i_F + 1) + D \cdot \sqrt{i_F}$$

| | Coefficients for max curves | |
|----------|-----------------------------|-------------------------|
| | $T_j = 25^\circ\text{C}$ | $T_j = T_{j\text{max}}$ |
| A | 0.869879 | 0.692620 |
| B | 0.022542 | 0.021003 |
| C | 0.074643 | 0.110962 |
| D | -0.029819 | -0.044329 |

Forward characteristic model (see Fig. 1).

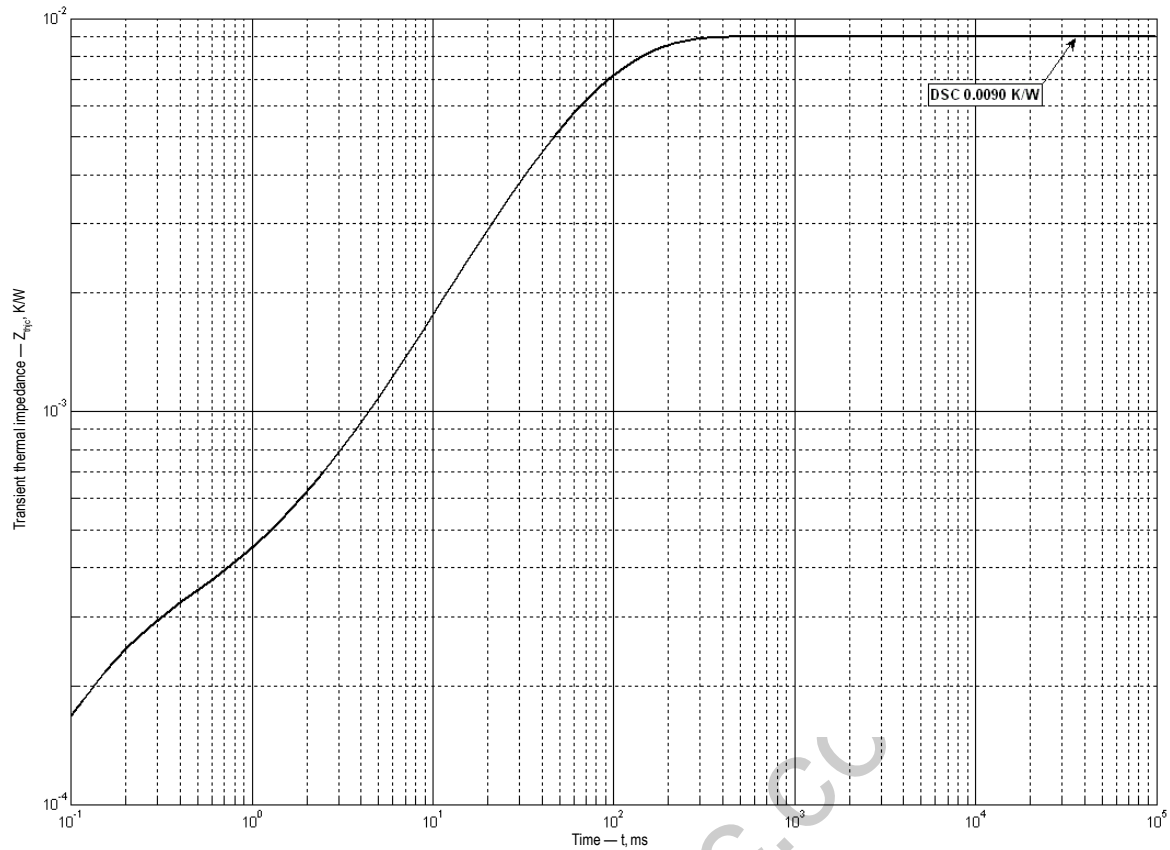


Fig 2 – Transient thermal impedance

$$Z_{thjc} = \sum_{i=1}^n R_i \left(1 - e^{-\frac{t}{\tau_i}} \right)$$

Where $i = 1$ to n , n is the number of terms in the series.

t = Duration of heating pulse in seconds.

Z_{thjc} = Thermal resistance at time t .

R_i = Amplitude of p_{th} term.

τ_i = Time constant of r_{th} term.

DC Double side cooled

| i | 1 | 2 | 3 | 4 | 5 | 6 |
|-------------------------------|----------|----------|-----------|------------|------------|-----------|
| R_i, K/W | 0.001448 | 0.006594 | 0.0006431 | 0.00004826 | 0.00004138 | 0.0002254 |
| τ_i, s | 0.08908 | 0.06263 | 0.01451 | 0.00151 | 0.0003338 | 0.0001058 |

Transient thermal impedance junction to case Z_{thjc} model (see Fig. 2)

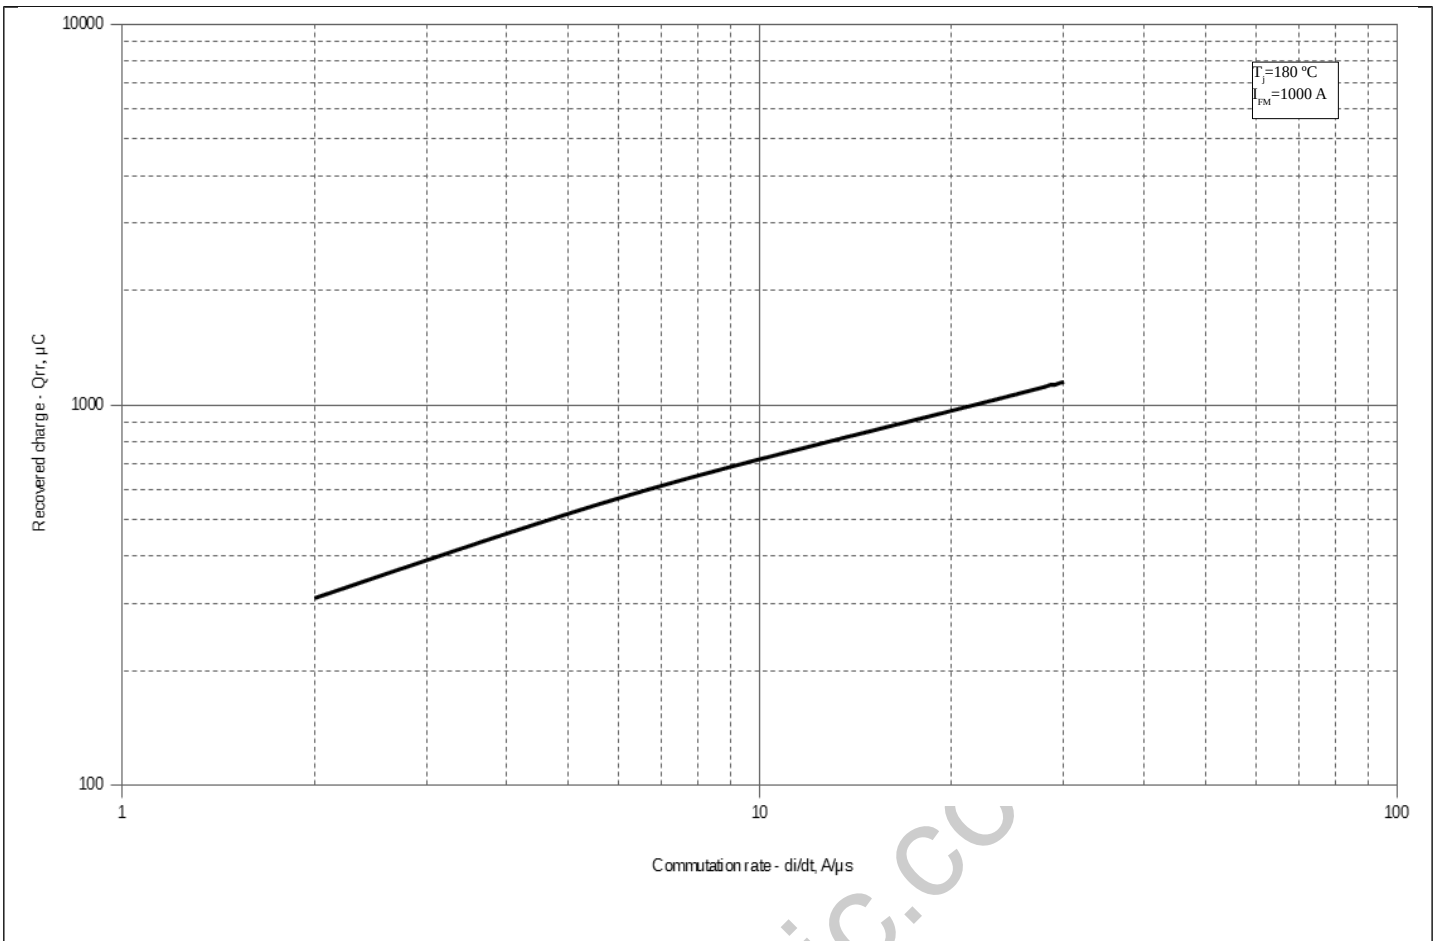


Fig 3 - Recovered charge, Q_{rr}

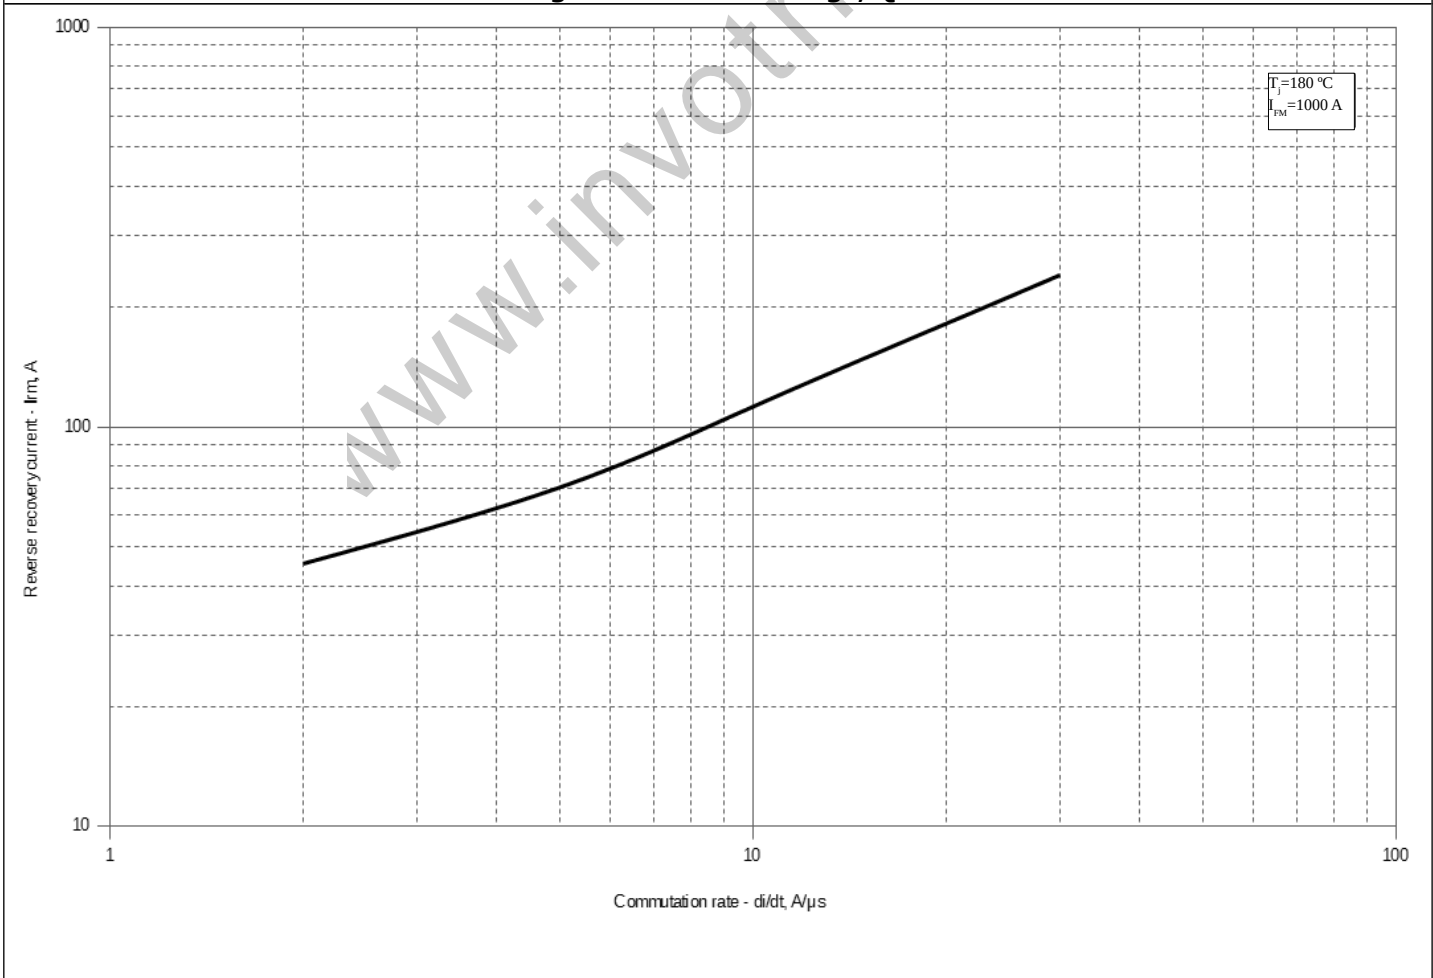


Fig 4 – Peak reverse recovery current, I_{rr}

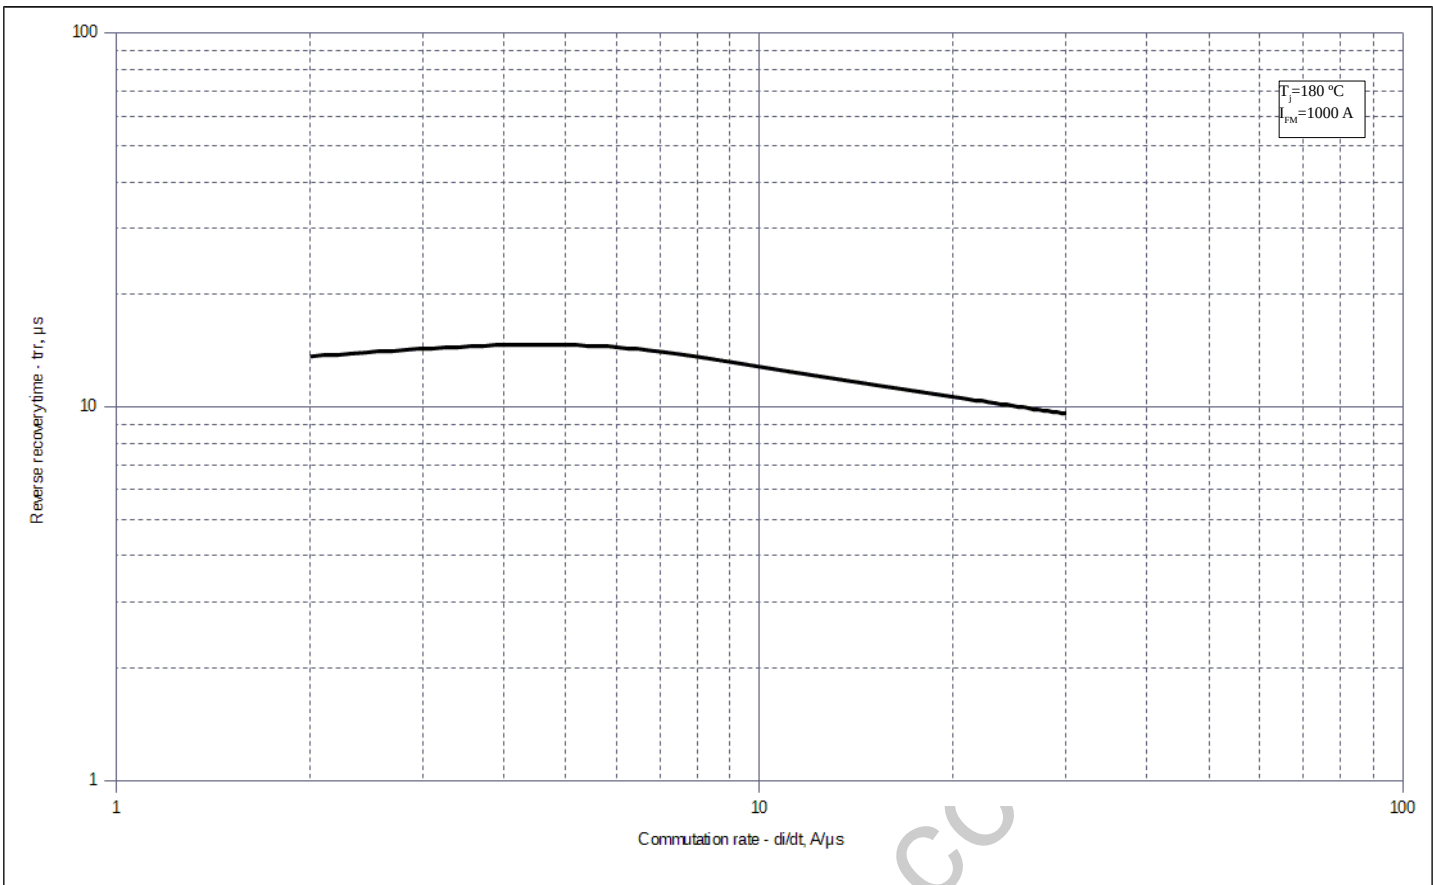


Fig 5 – Maximum recovery time, t_{rr} (linear)



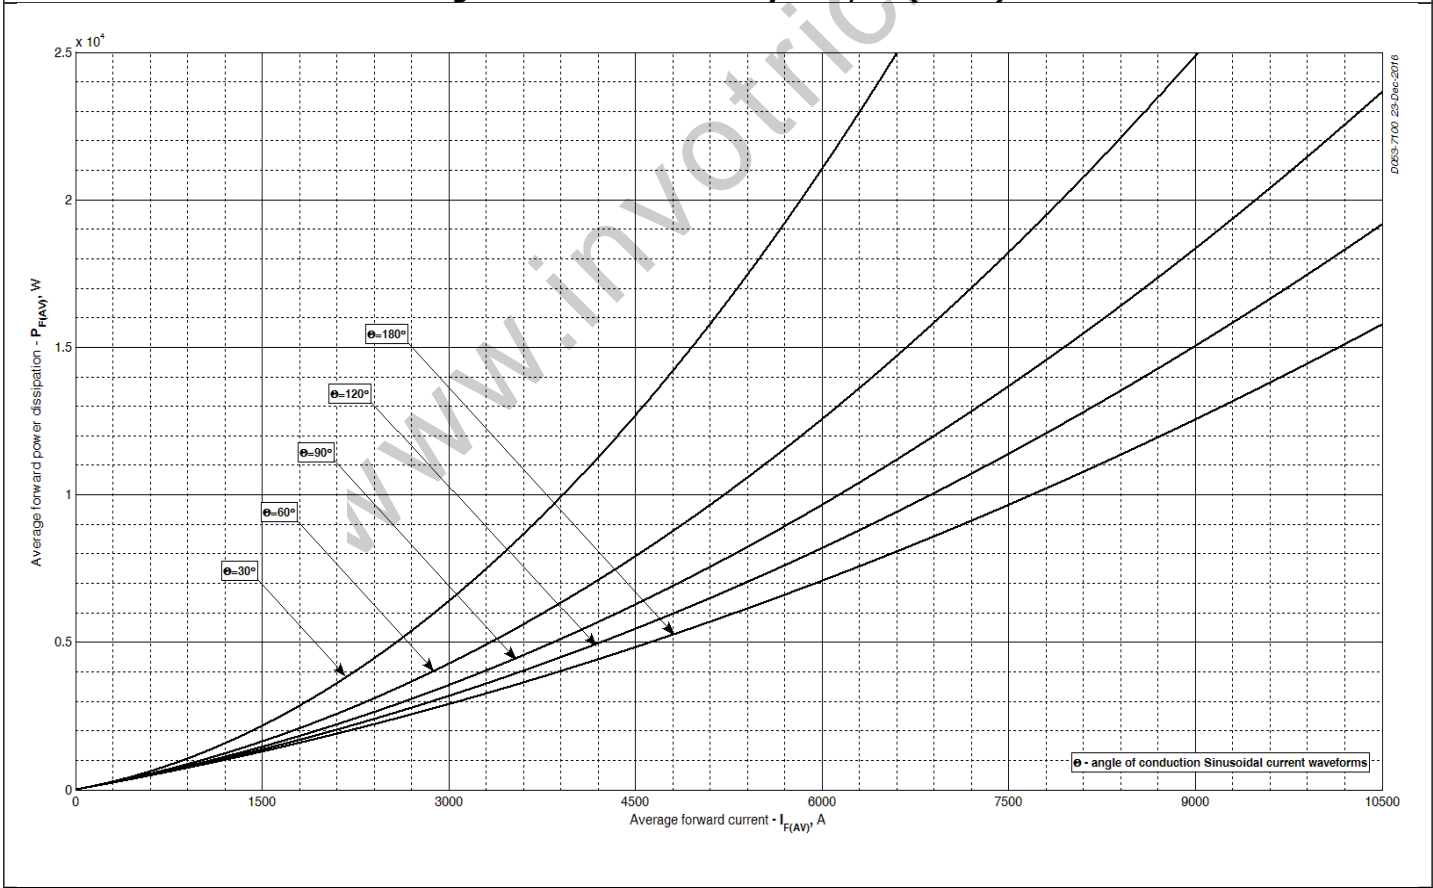


Fig 6 – Mean forward power dissipation P_{FAV} vs. Mean forward current I_{FAV} for sinusoidal current waveforms at different conduction angles ($f=50\text{Hz}$, DSC)

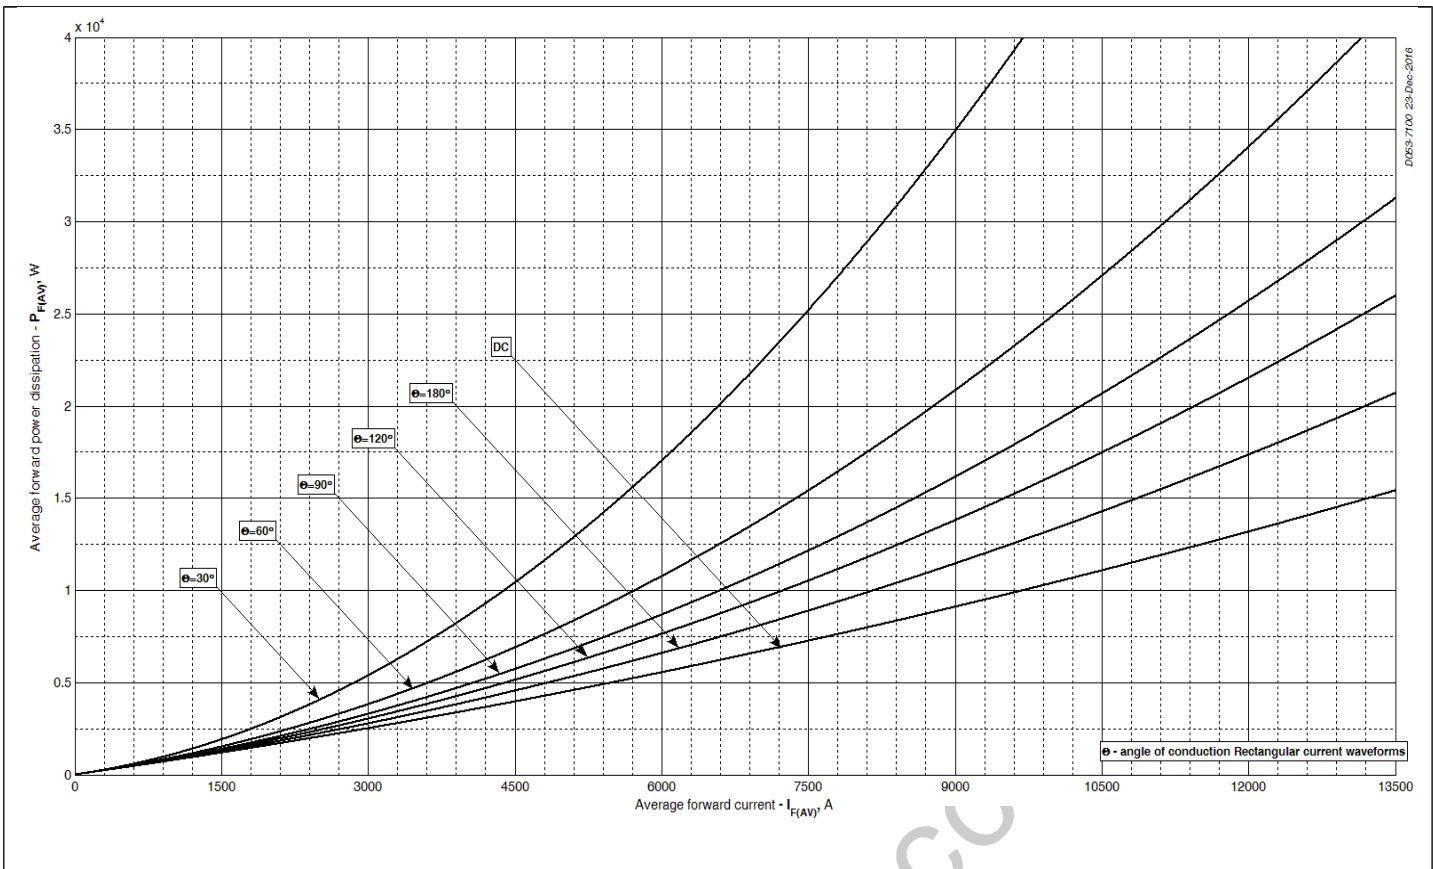

D053-7100-23-Dec-2016

Fig 7 – Mean forward power dissipation P_{FAV} vs. Mean forward current I_{FAV} for rectangular current waveforms at different conduction angles and for DC ($f=50\text{Hz}$, DSC)

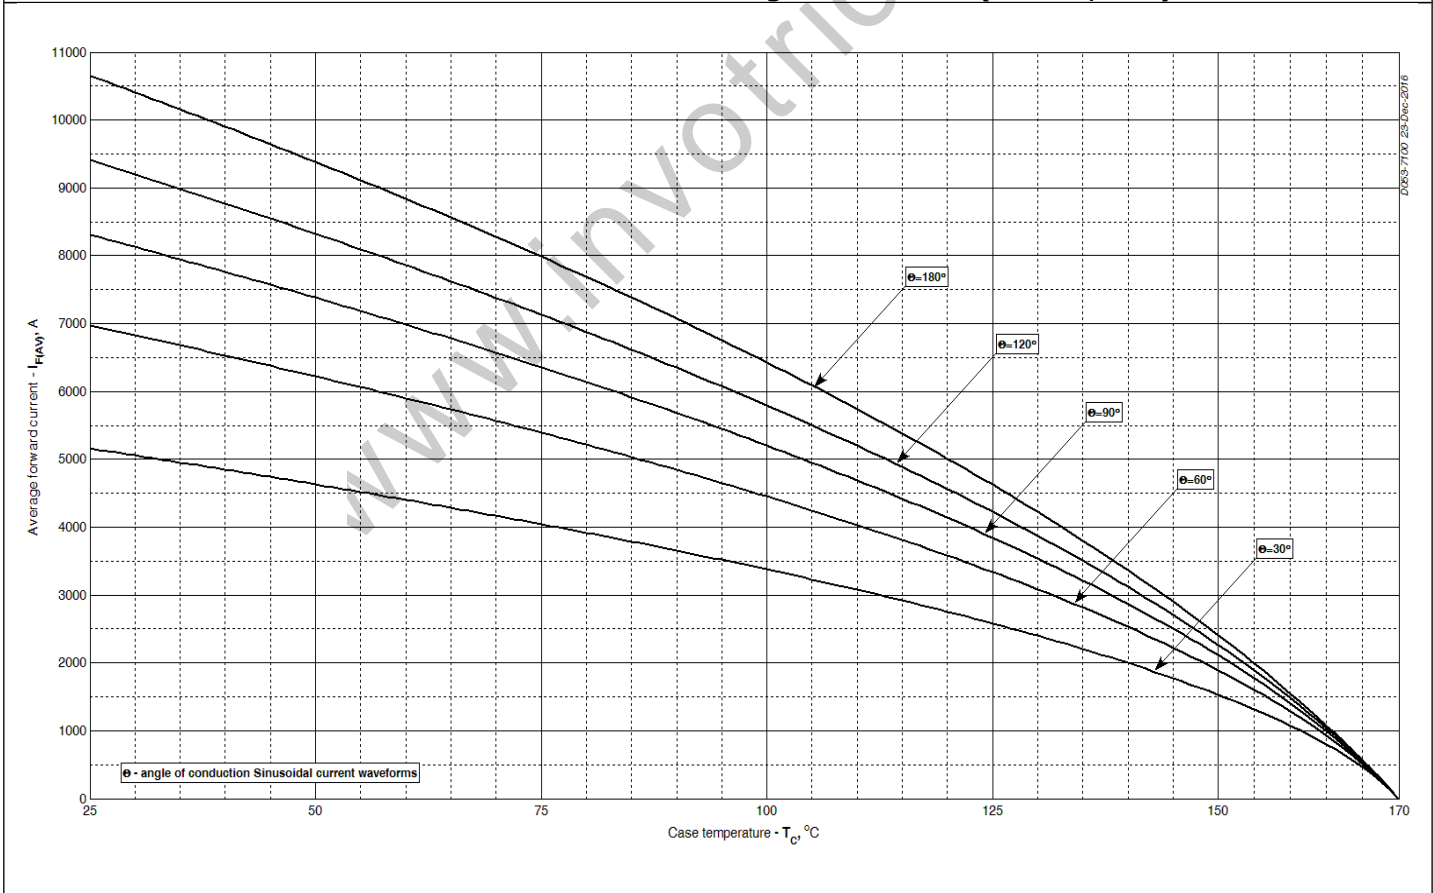

D053-7100-23-Dec-2016

Fig 8 - Mean forward current I_{FAV} vs. Case temperature T_C for sinusoidal current waveforms at different conduction angles ($f=50\text{Hz}$, DSC)

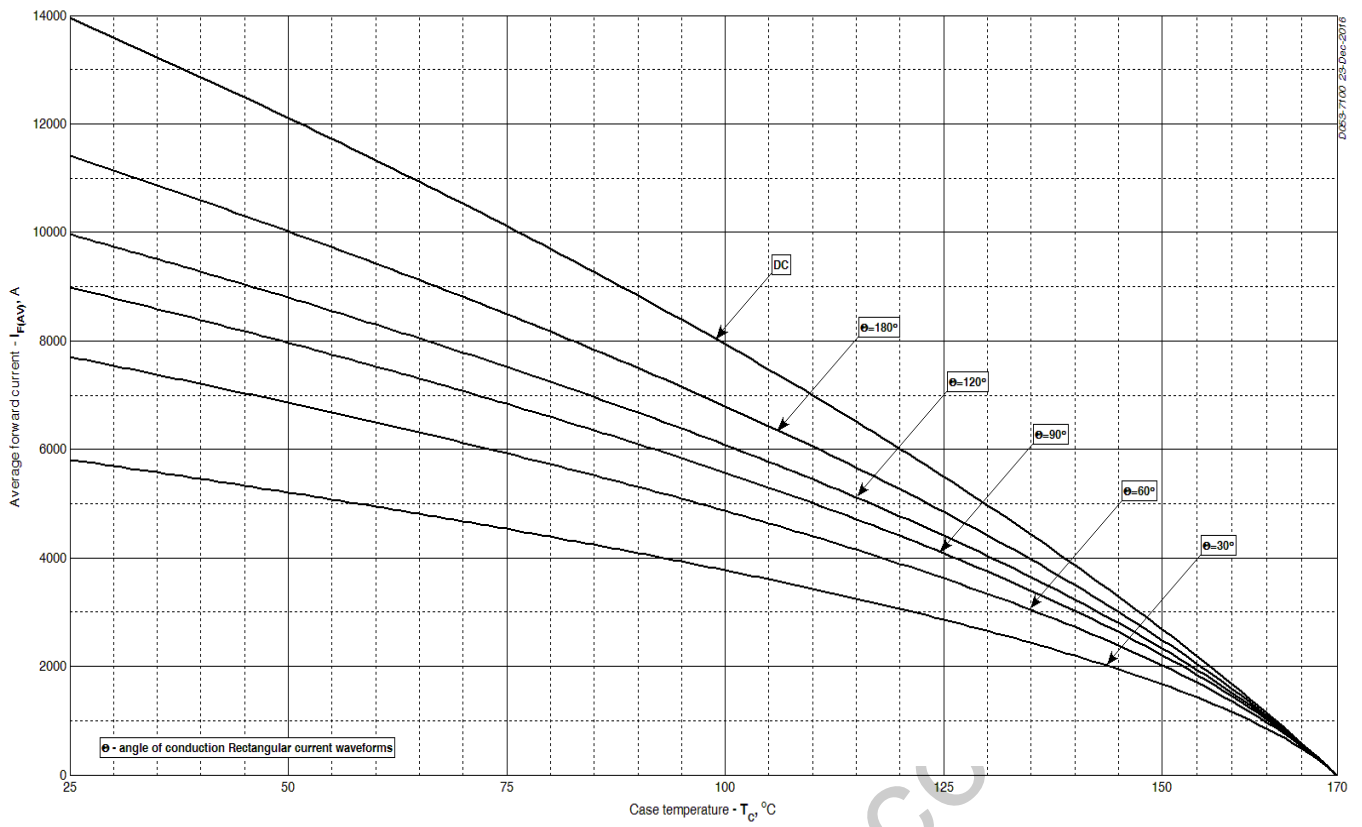


Fig 9 – Mean forward current I_{FAV} vs. Case temperature T_c for rectangular current waveforms at different conduction angles and for DC (f=50Hz, DSC)

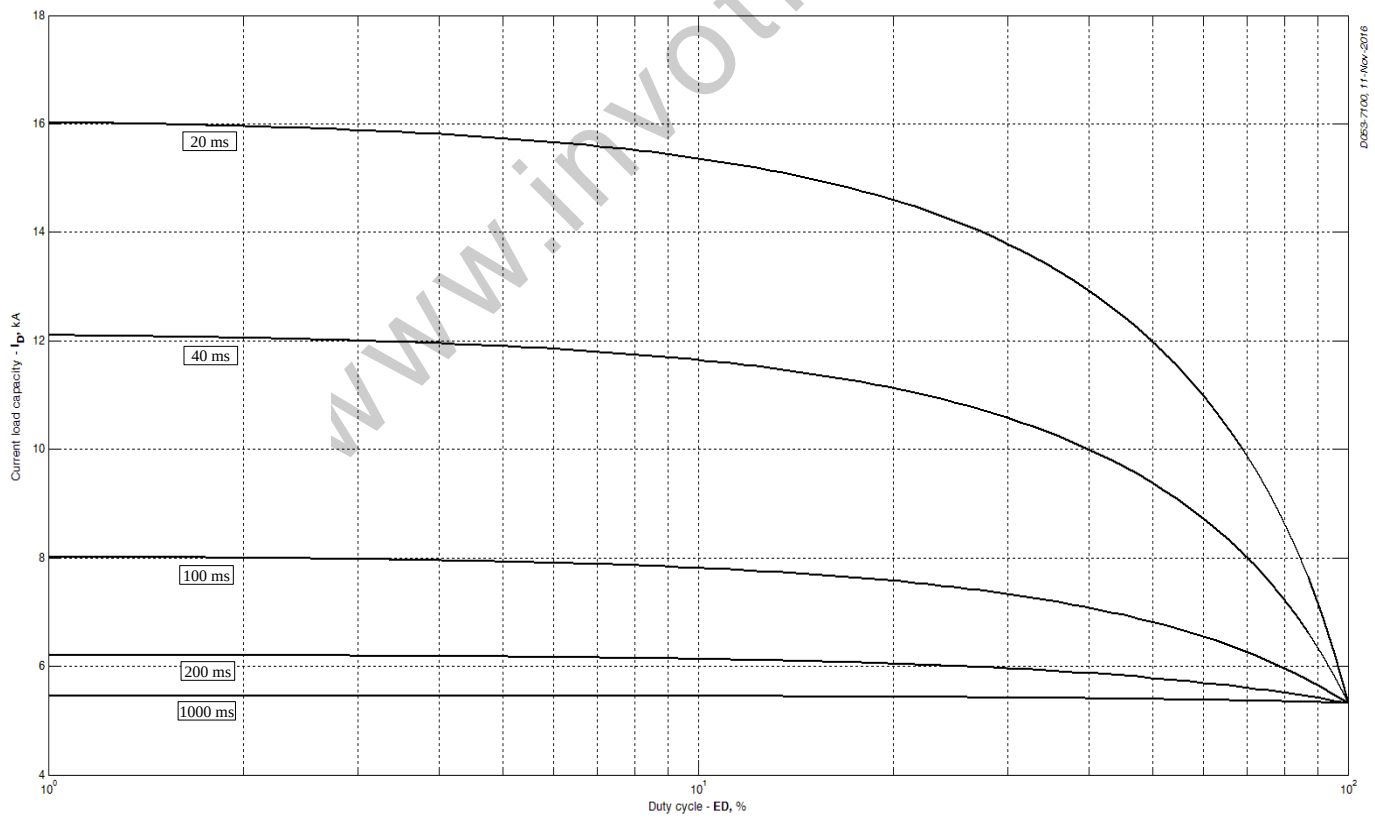


Fig 10 – Current load capability (f=1000 Hz, square wave, $T_c = 40\text{ °C}$)

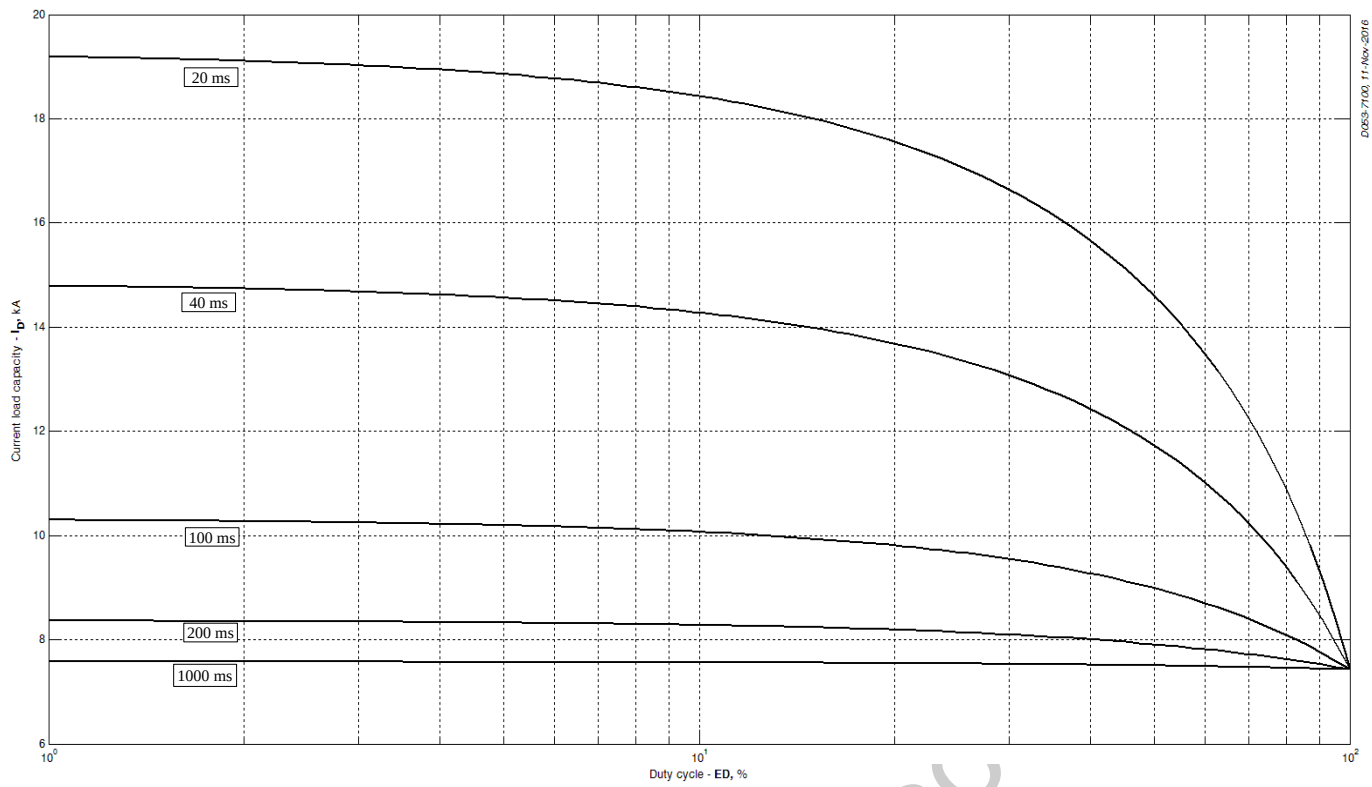


Fig 11 – Current load capability (f=1000 Hz, square wave, T_c = 60 °C)

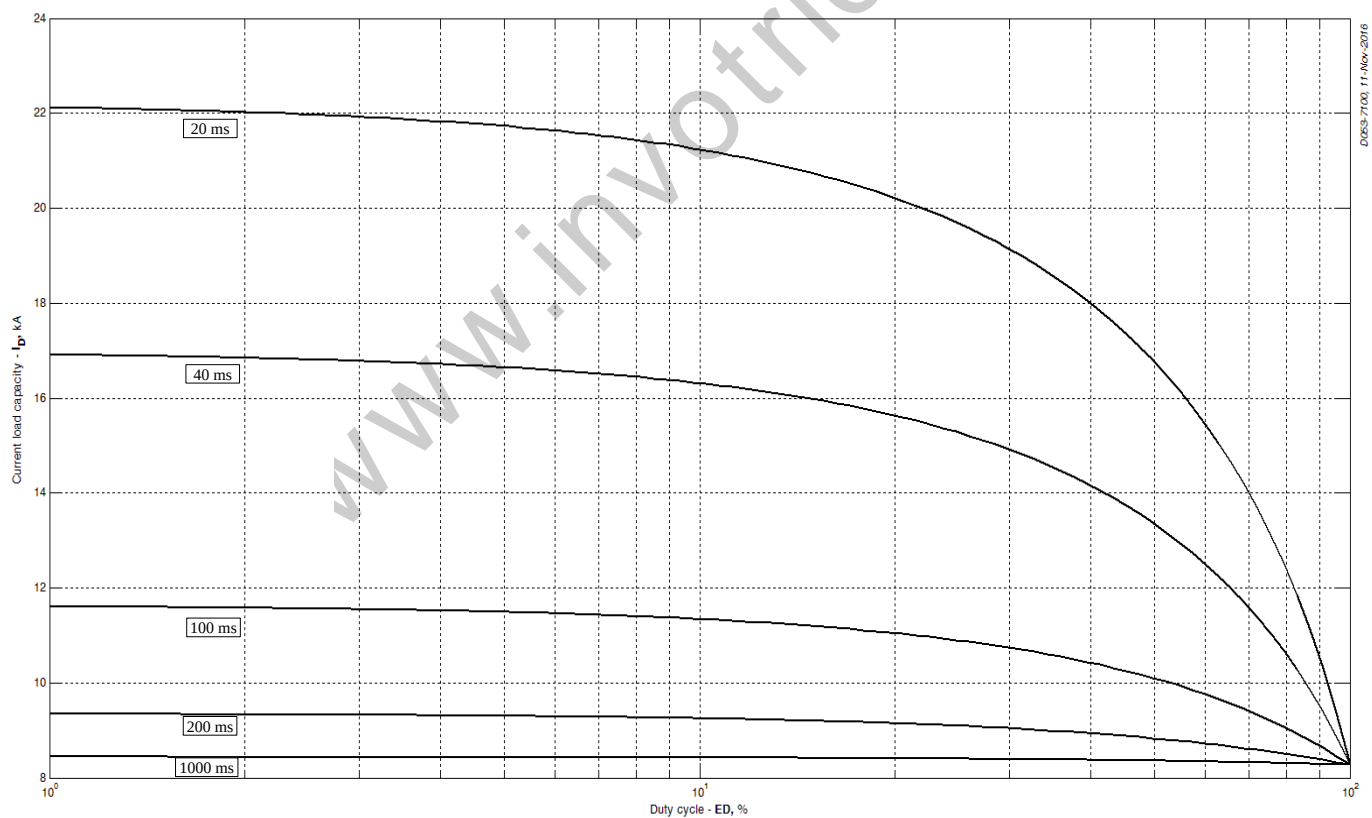


Fig 12 – Current load capability (f=1000 Hz, square wave, T_c = 70 °C)

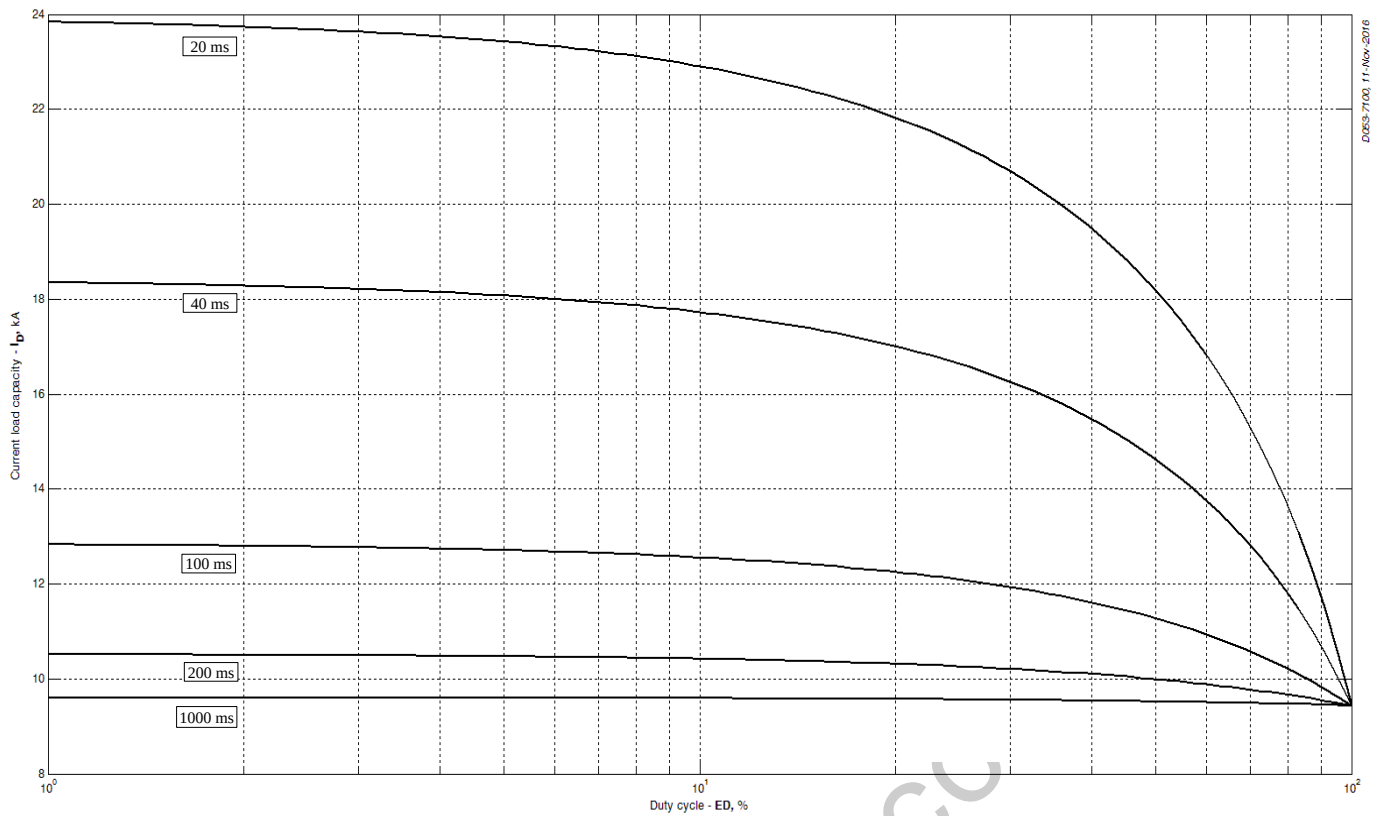


Fig 13 – Current load capability (f=1000 Hz, square wave, $T_c = 80\text{ }^\circ\text{C}$)

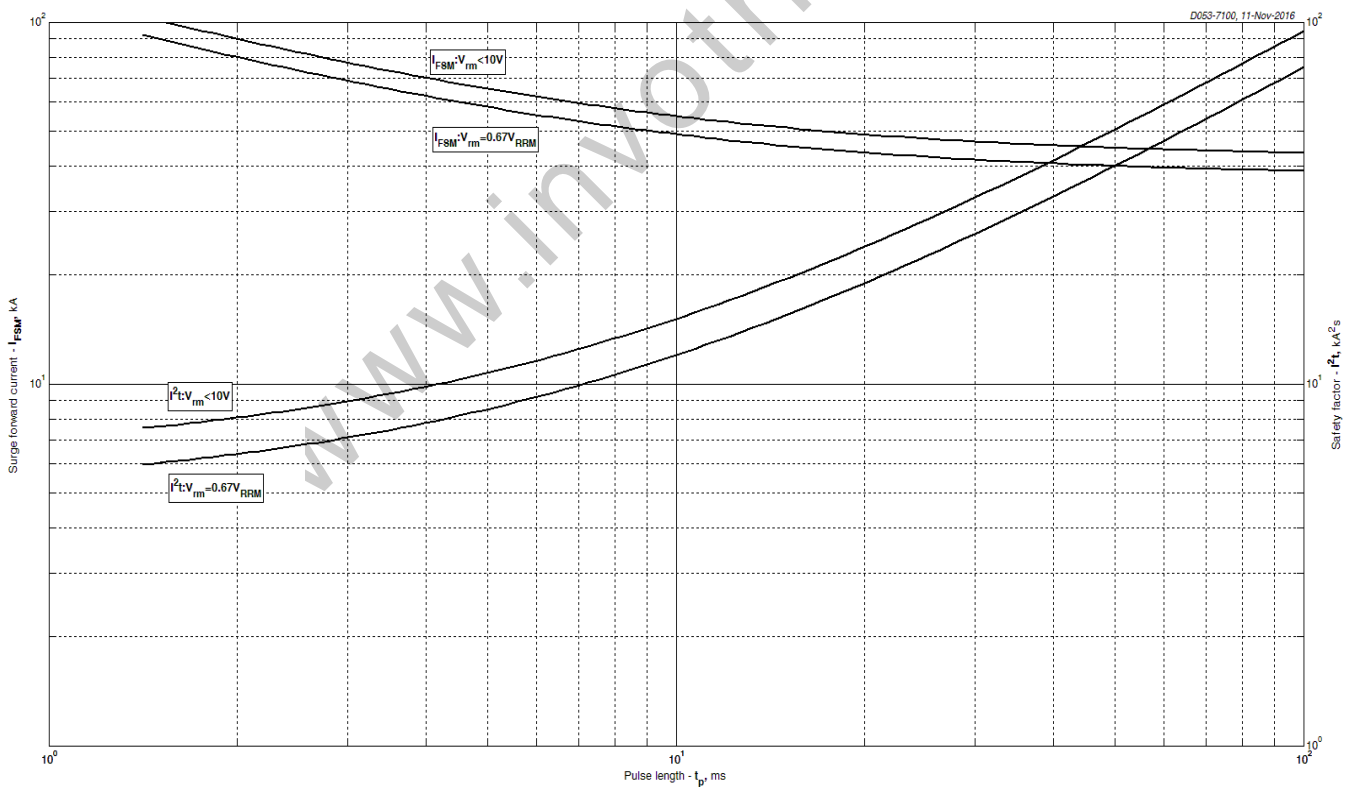


Fig 14 – Maximum surge and I^2t ratings

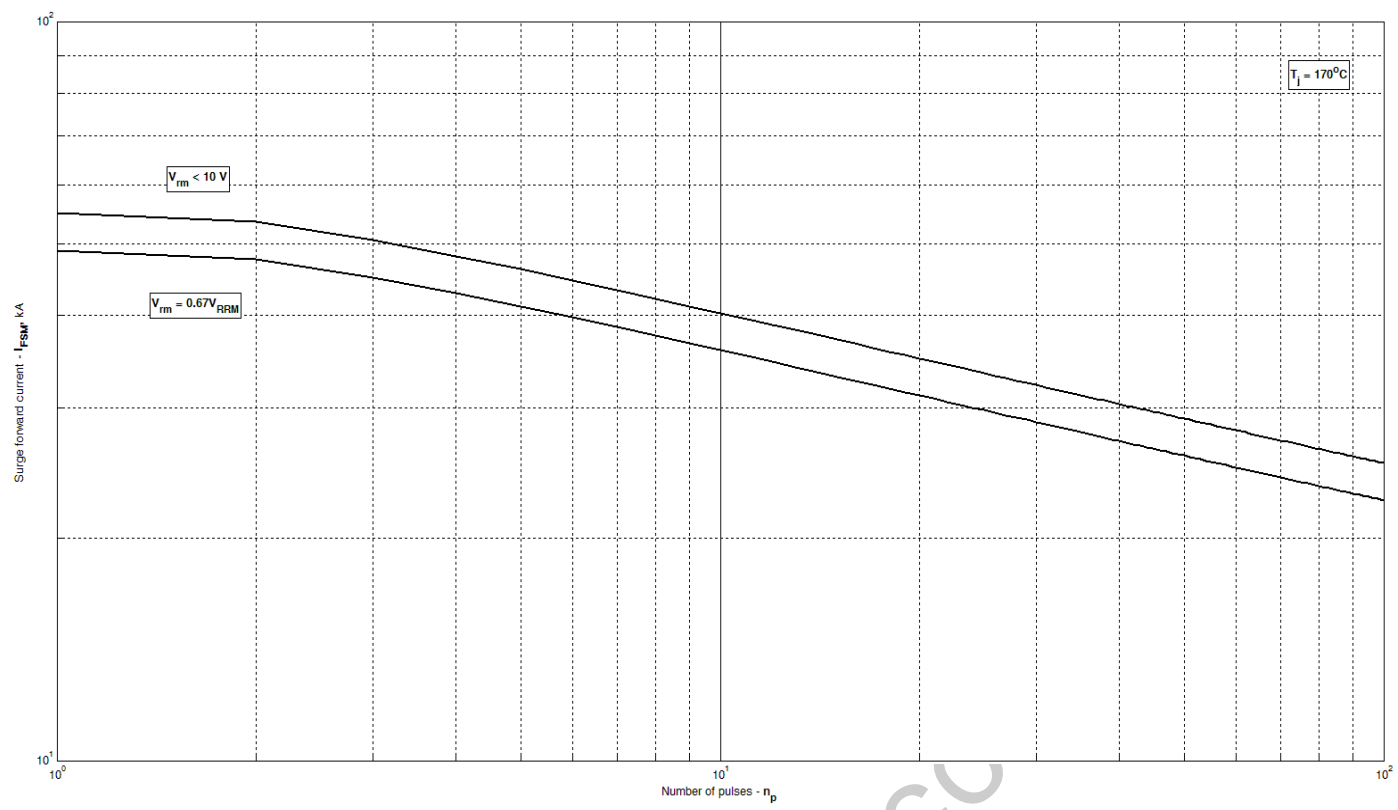


Fig 15 – Maximum surge ratings

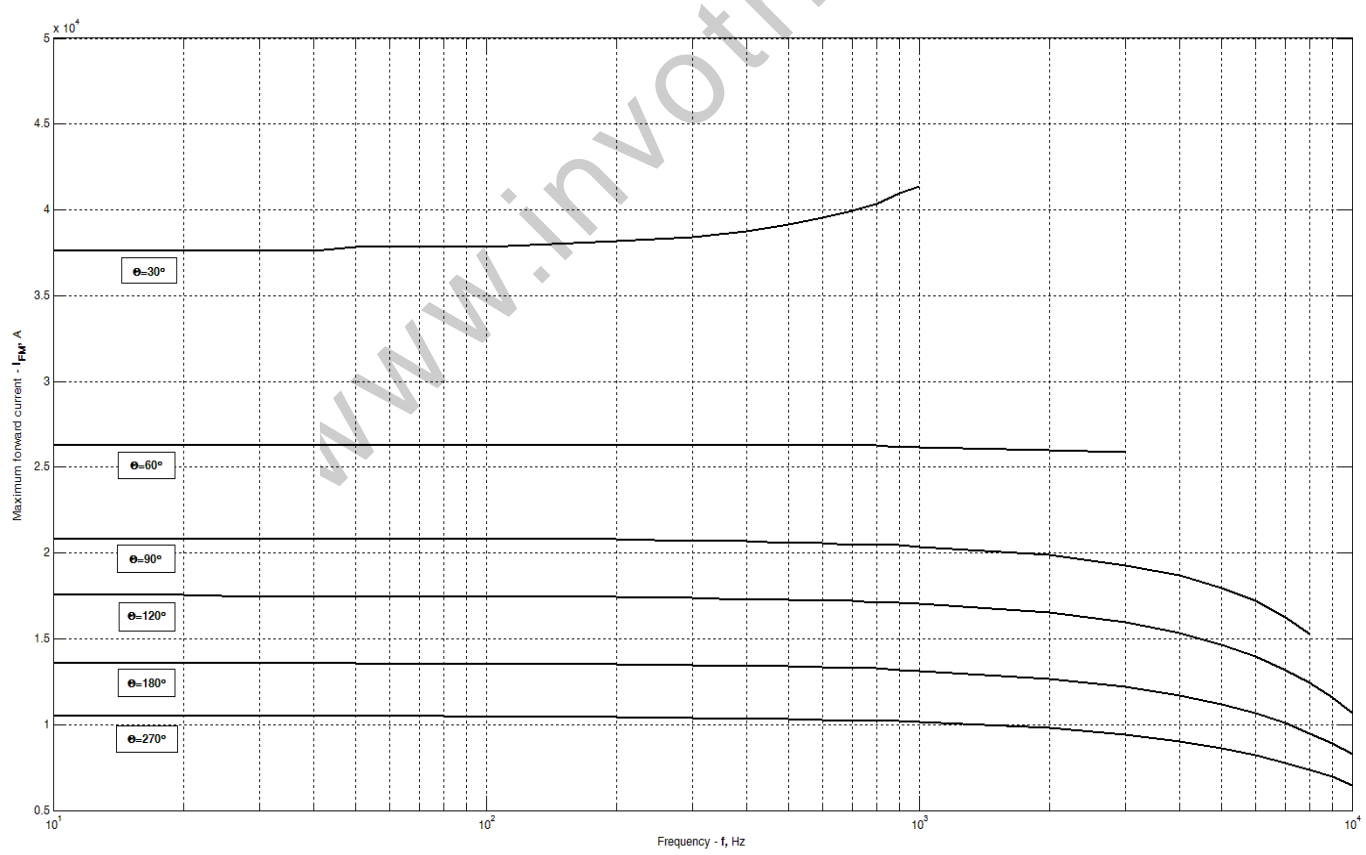
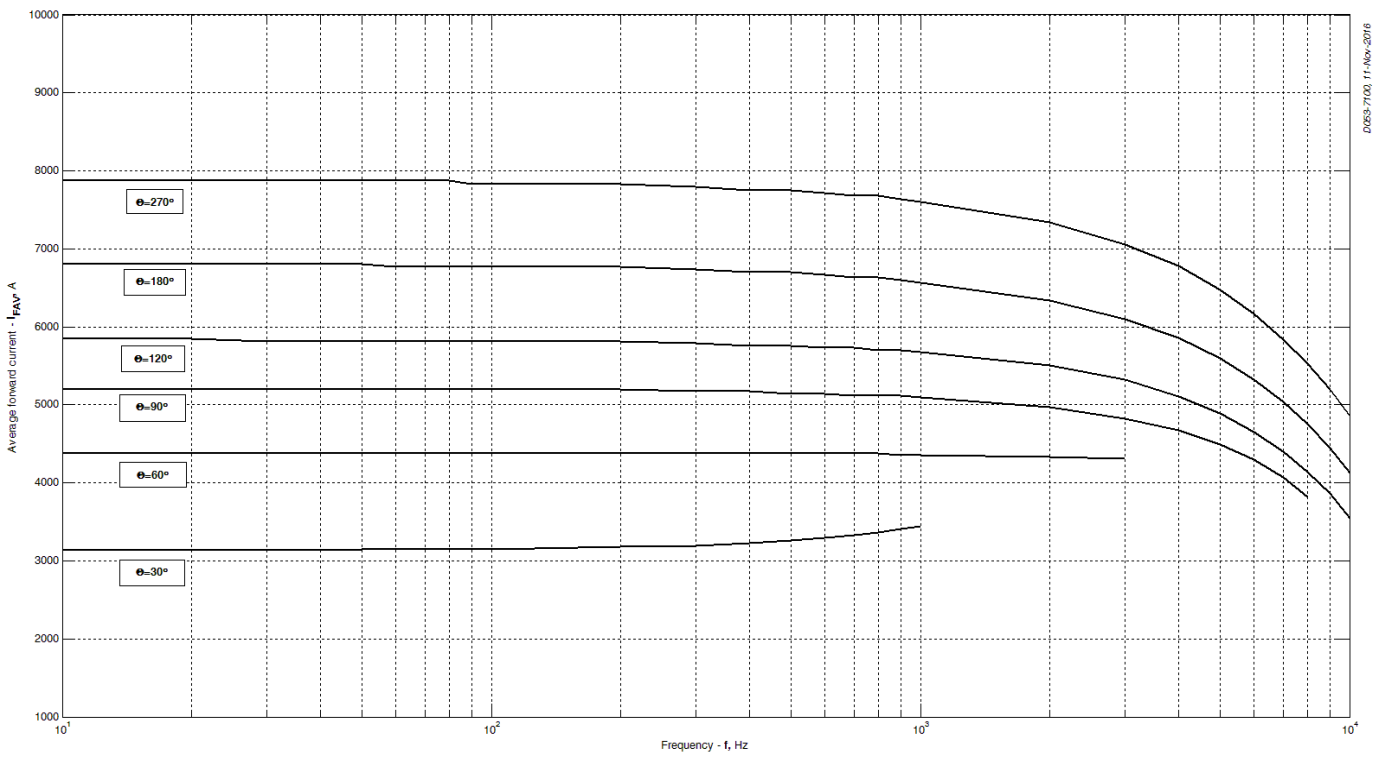


Fig 16 –Maximum forward current vs. frequency, trapezoid waveform, $T_C=85^\circ\text{C}$, $di_F/dt=\pm 500\text{ A}/\mu\text{s}$, $V_R=100\text{ V}$



**Fig 17 –Average forward current vs. frequency, trapezoid waveform,
T C =85 °C, di_F/dt=±500 A/μs, V_R =100 V**

www.invotric.com